


Gooch & Housego

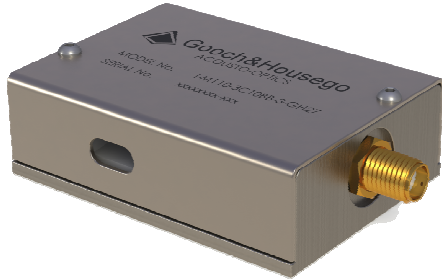

400 – 540nm Acousto-Optic Modulator

I-M110-2C10B6-3-GH26

An acousto-optic modulator for use in the 400 – 540nm wavelength range, ideal for frequency doubled Nd:YAG and Nd:YVO₄ lasers and diode or gas lasers within this range.

Manufactured in Crystal Quartz for improved thermal management and efficiency. This modulator combines high quality optical finishing with high grade anti-reflection coatings to maintain superior beam quality and high optical throughput.

In addition to the specifications indicated, we also offer alternative wavelengths, RF frequencies, active apertures & a wide range of custom housing configurations. We also offer full custom design & manufacturing, enabling our customers to achieve the perfect solution.

Our scientists and engineers are available to assist in selecting the most appropriate Acousto-Optic device and RF driver for your application.

Please contact our sales team for further information.

Key Features:

- Crystal Quartz
- 400 – 540nm
- High damage threshold
- 110MHz

Applications:

- Industrial (material processing):
 - Pulse Picking
 - Laser intensity control

General Specifications

Interaction material:	Crystal Quartz
Wavelength:	400 - 540nm
Optical polarisation:	Linear, vertical to base
AR coating reflectivity:	< 0.5% per surface
Damage threshold:	> 500MW/cm ² (pulsed)
Transmission (single pass):	> 99.0%
RF frequency:	110MHz
VSWR:	< 1.2:1
Active aperture:	2.0mm
Acoustic mode:	Compressional
Rise-time:	113ns/mm
Separation angle:	10.2mrad at 532nm
Diffraction Efficiency:	> 85%
RF power:	< 5W

Ordering Code

Explanation: I-M110-2C10B6-3-GH26 (Modulator, 110MHz, 2.0mm active aperture, compressional mode, Crystal Quartz, 400 - 540nm, SMA male bulkhead, GH26 housing).

I	-	M	1	1	0	-	2	C	1	0	B	6	-	3	-	G	H	2	6
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

